Product SPECIFICATION SHEET


ACDC DYNAMICS
www.acdc.co.za


DL-20D1




These filters are suitable for use with digital systems such as switch mode power supplies to suppress the continued or intermittant pulse interference especially for low impedance loads

Model DL-	
Rated Voltage	250VAC
Rated Current	20A
Operating Frequency	50 / 60Hz
Test Voltage L - L (1min)	1500VAC
Test Voltage L - N (1min)	1500VDC
Insulation Ω (L - Gnd)	3000MΩ
Leakage Current	≤ 0.5mA

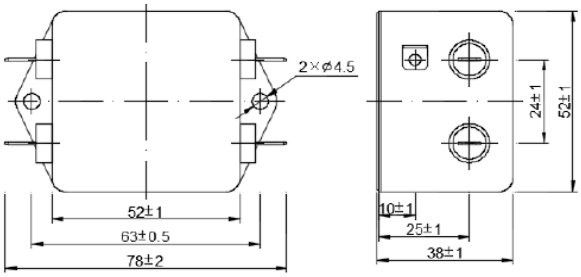

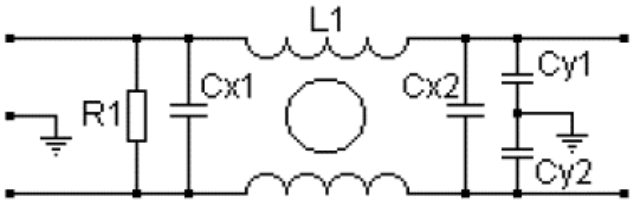

Insertion Loss in dB: (Measured in 50Ω system , as IEC/CISPR NO.17)

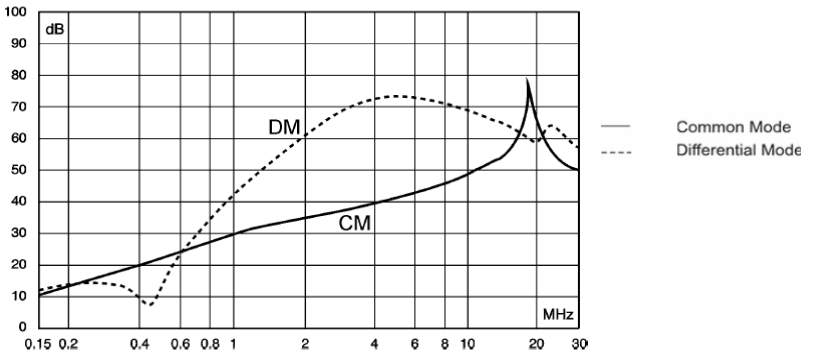

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za